BOARD OF COMMISSIONERS
OSBORN NESBITT, SR., CHAIRMAN
Sherri L. Washington, Commissioner Post I
Dr. Doreen Williams, Commissioner Post II

DEPARTMENT OF FINANCE
ROSELYN MILLER, DIRECTOR
TELEPHONE: 770-278-7555
FACSIMILE: 770- 278-8910

ITB No. 20-11
ALGAECIDES CONTAINING COPPER SULFATES FOR THE WATER TREATMENT PLANT

June 18, 2020

ITB #20-11 is hereby amended as follows:

1. **Below are questions received and corresponding answers:**

   A. Question: I did not see an Affidavit Verifying for Status for County Public Benefit Application OCGA 50-36-1(e)(2) OR Contractor Affidavit OCGA 13-10-91(b)(1). Are these two forms that are required for this bid? If so, will they be provided by Rockdale County for bidders to fill-out and submit?

   Answer: They are not required for this Bid.

   B. Question: Do you have any specs on the copper sulfate that you can send?

   Answer: Liquid Copper Sulfate 25% or higher.

   C. Question: I see you have an 800/gl tank, but can we confirm if they want bulk deliveries or would tote pump offs be accepted? (assuming this is a solution and not a dry need/ dry storage tank)

   Answer: Yes tote pump off will be accepted.

   D. Question: Distance of delivery point to tank fitting, number of hose length required?

   Answer: Will need at least 40' hose length for delivery point.

   E. Question: Size of fitting or discharge port/plumbing for bulk storage tank

   Answer: No fitting or discharge port requirement for now. Once contract is award, we will have that discussion.

BOARD OF COMMISSIONERS
OSBORN NESBITT, SR., CHAIRMAN
Sherri L. Washington, Commissioner Post I
Dr. Doreen Williams, Commissioner Post II

DEPARTMENT OF FINANCE
ROSELYN MILLER, DIRECTOR
TELEPHONE: 770-278-7555
FACSIMILE: 770- 278-8910

F. Question: What are the driveway dimensions/capability of maneuvering truck on site?

Answer: Please see the attachment for Site drawing.

G. Question: Are there proper safety measures in place?

Answer: Proper safety measures will depend on company delivery the chemical. Once contract is award, we will have that discussion.

H. Question: Are there additional safety measures outlined by the county for delivery?

Answer: No additional safety measures by the county for delivery other then calling ahead. Once contract is award, we will have that discussion.

2. All other conditions remain in full force and effect.

3. If a Bid has been submitted and anything in this Addendum causes the bidder to change the item offered or to increase or decrease the Bid price, the new price and/or changes will be inserted below:

_____

_____

4. All bidders under this Invitation to Bid are kindly requested to acknowledge receipt of this Addendum on page 12 of the Bid Form.

Tina Malone

Tina Malone, CPPB CPPO
Procurement Officer
Department of Finance, Purchasing Division

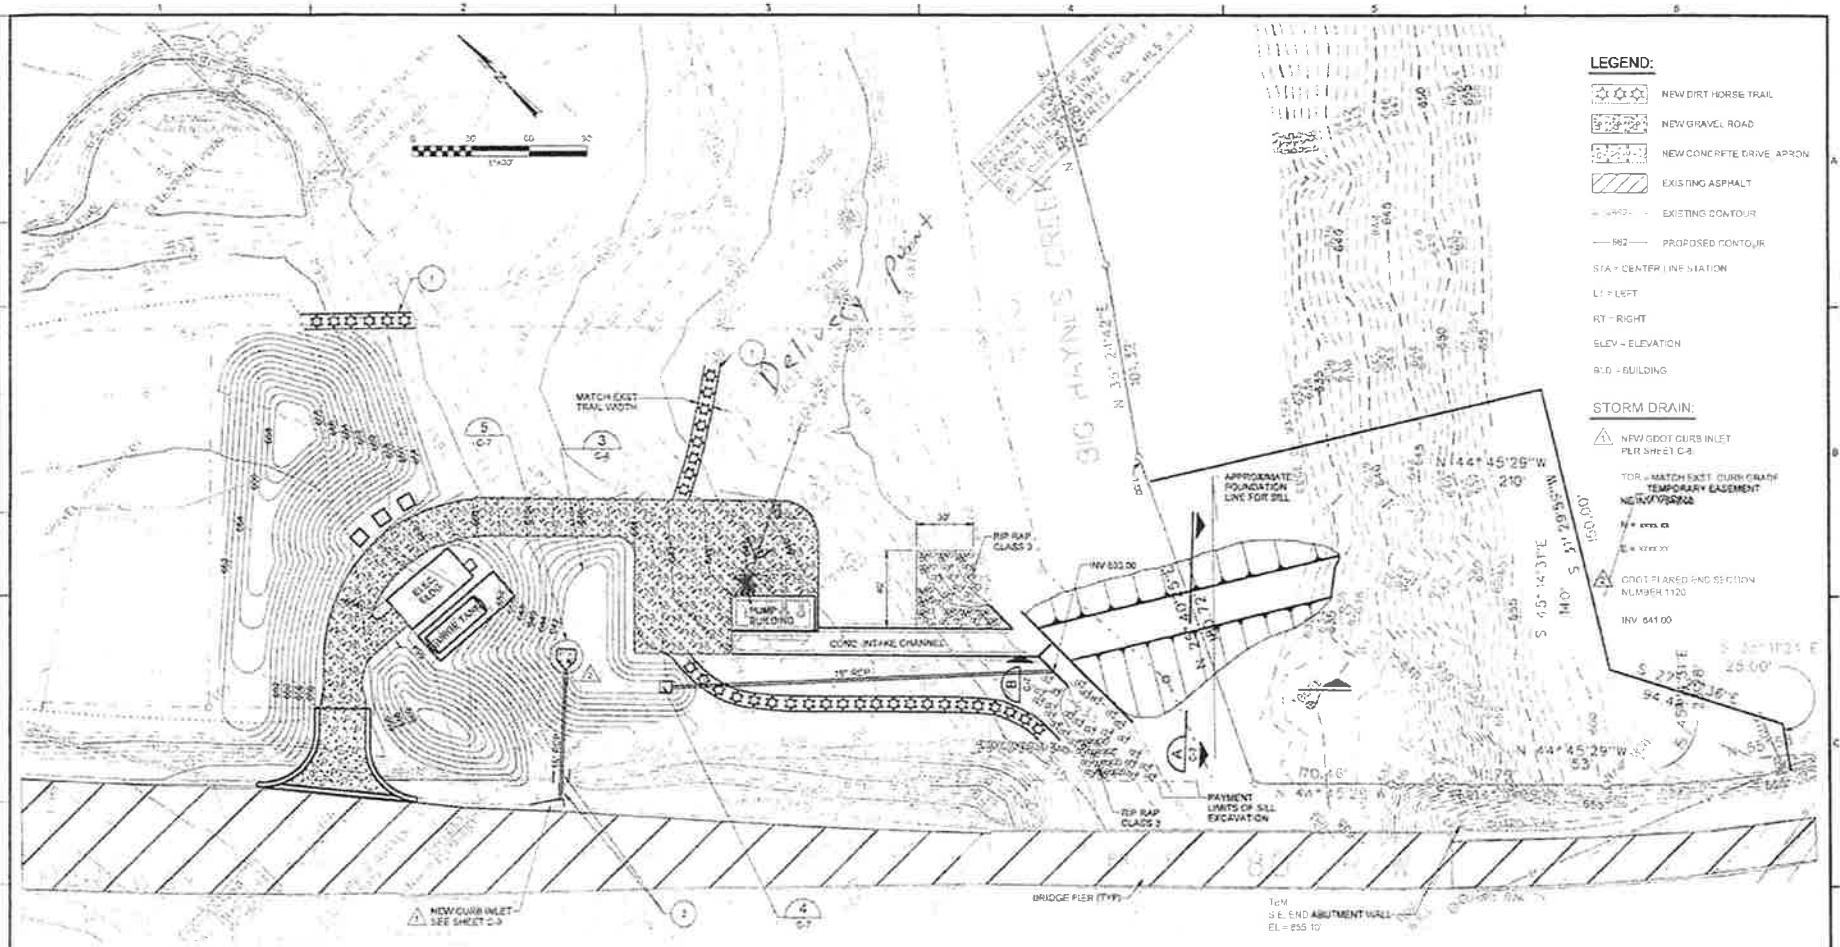

NOTES:

1. PROVIDE GENTLE TRANSITION FROM EXISTING DIRT HORSE TRAIL TO NEW DIRT HORSE TRAIL. LOCATION SHOWN IS FOR GRAPHICAL PURPOSES ONLY. CONTRACTOR TO ROUTE SO NO TREES GREATER THAN 3" DBH ARE REMOVED. IF TREES ARE REMOVED ALL ROOTS AND STUBS MUST BE REMOVED DOWN TO A DEPTH OF 12" BELOW GROUND SURFACE.
2. CONTRACTOR TO REMOVE EXISTING CONCRETE FLUME AND AS MUCH OF THE EXISTING CONCRETE DITCH AS NECESSARY. CONTRACTOR TO RECONSTRUCT THE CONCRETE DITCH TO LIKE NEW CONDITION ONCE THE STORM DRAIN PIPE IS INSTALLED.
3. SAW CUT THE EXISTING CONCRETE TO BE REMOVED IN NEAT STRAIGHT LINES.
4. LOCATION OF EXISTING UTILITIES ARE BASED ON THE BEST AVAILABLE RECORDS. THE OWNER AND ENGINEER EXPRESSLY DISCLAIM ANY RESPONSIBILITY FOR THE ACCURACY OR COMPLETENESS OF SAID INFORMATION AND THE CONTRACTOR WILL NOT BE ENTITLED TO ANY EXTRA COMPENSATION ON ACCOUNT OF INACCURACY OR INCOMPLETENESS OF SUCH INFORMATION. SAID INFORMATION BEING SHOWN ONLY FOR THE CONVENIENCE OF THE CONTRACTOR, WHO MUST FIELD VERIFY THE INFORMATION GIVEN TO HIS OWN SATISFACTION. IF THE CONTRACTOR RELIES ON THE GIVEN INFORMATION, HE DOES SO AT HIS OWN RISK.
5. CONTRACTOR TO SEED AND MULCH ALL DISTURBED AREAS PER THE SPECIFICATIONS.
6. CONTRACTOR SHALL NOT ALLOW THE SITE OF THE WORK TO BE LITTERED WITH TRASH AND WASTE MATERIAL. SUH SHALL MAINTAIN THE SAME IN A NEAT AND ORDERLY CONDITION THROUGHOUT THE PERIOD OF WORK.
7. ALL RETENTION PONDS TO BE CONSTRUCTED FIRST - SO AS TO PROVIDE DRAINAGE. EXCAVATE POND TO 0.25' OF THE DESIGN BOTTOM ELEVATION. AFTER CONSTRUCTION IS COMPLETE EXCAVATE POND TO THE DESIGN BOTTOM. REMOVING ALL SILT AND TRASH. THEN SEED AND MULCH PER THE SPECIFICATIONS.
8. THE CONTRACTOR SHALL COORDINATE CONSTRUCTION SHOWN ON THE DRAWINGS WITH MECHANICAL AND ELECTRICAL DRAWINGS. ANY DISCREPANCIES OR QUESTIONS SHALL BE BROUGHT TO THE ATTENTION OF THE ENGINEER BEFORE COMMENCING WITH THE WORK.
9. IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO PROVIDE A UNIFORM BEARING CAPACITY UNDER ALL FOUNDATIONS.

May 8. 1124/3
1/28/2001

DRAWN	W. MURPHY				
DES	W. MURPHY				
DWN	G. MURPHY				
REVIEW	G. MURPHY	NO	DATE	REVISION	BY	APVD

VERIFY SCALE
BAR IS ONE INCH ON ORIGINAL DRAWING
0 1
IF NOT ONE INCH ON THIS SHEET, ADJUST SCALES ACCORDINGLY

CH2MHILL

ROCKDALE WATER RESOURCES
RAW WATER INTAKE PUMP STATION
ROCKDALE COUNTY, GEORGIA

RAW WATER PUMP STATION
CIVIL

SITE AND GRADING PLAN

SHEET
DWG C-1
DATE JANUARY 2001
PROJ 155229.A1

02-NOV-2000 08:34:58 5229rwdp02ff.dgn

REUSE OF DOCUMENTS

THIS DOCUMENT, AND THE IDEAS AND DESIGNS INCORPORATED HERIN, AS AN INSTRUMENT OF PROFESSIONAL SERVICE, IS THE PROPERTY OF CH2M HILL AND IS NOT TO BE USED IN WHOLE OR IN PART FOR ANY OTHER PROJECT WITHOUT THE WRITTEN AUTHORIZATION OF CH2M HILL.

CONFORMED